

## adjustable three-way tying plate




The ideal solution when a straight tie rod cannot be used, e.g. at abutment/wingwall corners.

### The advantages:

- sustainable: recoverable tie rods
- No additional welding
- Infinitely adjustable angles
- Simple application
- Low-cost solution

### Technical specifications:

- Permissible tensile force 64 kN
- For  $\varnothing$  15 mm tie rods
- Dimensions (L x W x H)  
approx. 140 x 140 x 80mm  
Plate size 114 x 105 x 80 mm
- Weight approx. 3,0 kg

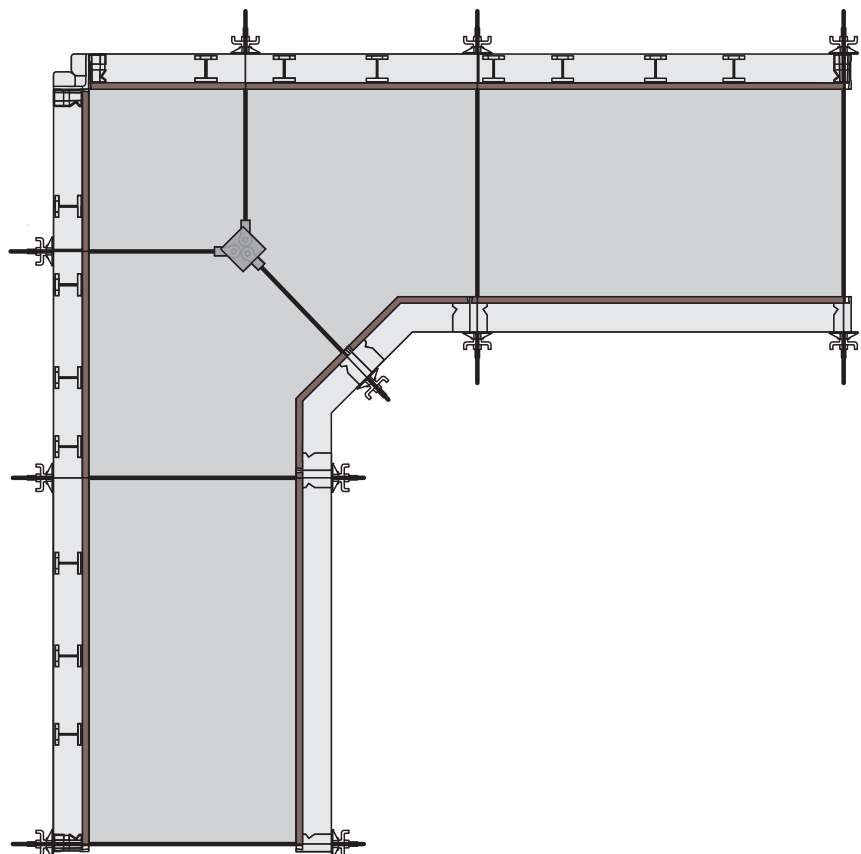


# Enquiry

## NOE three-way tying plate

info@noe.de

Please provide us with a quotation:

	No. of units	Description	Part-No.
		NOE three-way tying plate	682500
<b>Requested delivery date</b>		<b>(subject to stock levels)</b>	

Company	
Department	
Contact	
Street	
Post code, city	
Tel.	Fax
e-mail	
Date	Signature

The supply of the items shown in this list shall be exclusively subject to NOE's general conditions of business. We accept no liability for any printing errors. Technical illustrations and information as well as images are not binding. We reserve the right to make technical changes.

**NOE-Schaltechnik**  
**Georg Meyer-Keller GmbH + Co. KG**

Kuntzestraße 72, 73079 Süssen, Germany  
 Telefon +49 7162 13-1  
 Telefax +49 7162 13-288  
 info@noe.de  
 www.noe.de  
 www.noeplast.com